

ALWAYS FACE FRONT OF CABINET WHEN POSITIONING PLAYFIELD TO ASSURE PROPER ALIGNMENT OF PLAYFIELD TO CABINET.

SERVICE POSITION 1

LIFT PLAYFIELD AT CENTER OF BOTTOM ARCH (INSTRUCTION CARD HOLDER) UPWARD AND TOWARD BACK BOX (FIG. 1.1) UNTIL PLAYFIELD CONTACTS STOP BLOCK LOCATED ON LOWER LEFT WALL OF CABINET. (FIG. 1.2) WITH PLAYFIELD NOW IN UPRIGHT POSITION, ATTACH SAFETY STRAP TO EYEBOLT ON PLAYFIELD. THIS STRAP WILL SECURE PLAYFIELD FOR SERVICING IN THIS POSITION. (FIG. 1.2)

USEFUL TO SERVICE TRANSFORMER, CABINET BOTTOM COMPONENTS, PLAYFIELD BOTTOM COMPONENTS, ETC...

REVERSE PROCEDURE WHEN SERVICE IS COMPLETE.

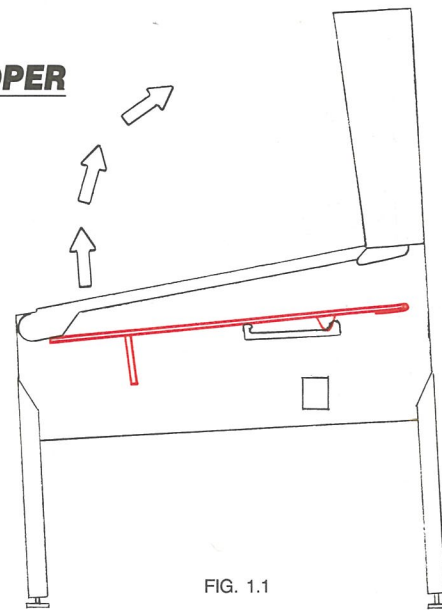


FIG. 1.1

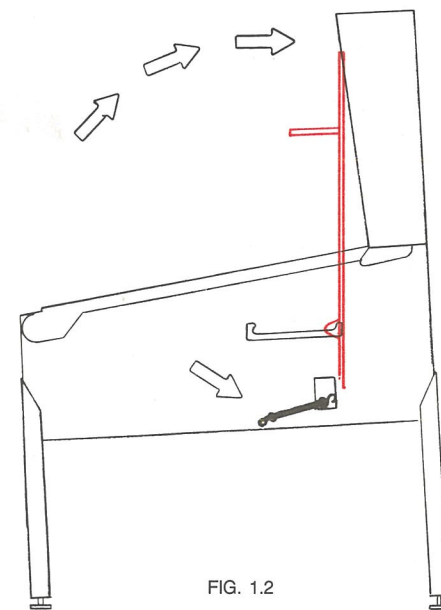


FIG. 1.2

Easy Access Service System

755-5025-00

PREVENTIVE MAINTENANCE

LUBRICATE SLIDE RAILS WITH LIGHT OIL PERIODICALLY TO ASSURE SMOOTH OPERATION.



CHICAGO, IL, U.S.A.
PINBALL CAPITAL OF THE WORLD

SERVICE POSITION 2

LIFT PLAYFIELD AT CENTER OF BOTTOM ARCH (INSTRUCTION CARD HOLDER) UPWARD (FIG. 2.1) UNTIL PLAYFIELD SUPPORT BRACKETS CAN BE SEEN TO CLEAR CABINET FRONT. (FIG. 2.2) AT THIS TIME PULL PLAYFIELD TOWARD FRONT OF CABINET, CHECKING THAT MECHANICAL COMPONENTS CLEAR CABINET FRONT. (FIG. 2-3) THEN REST PLAYFIELD ON SUPPORT BRACKETS AT FRONT CHANNEL OF CABINET.

USEFUL TO SERVICE TROUGH SWITCHES, CONNECTORS AT BACK OF CABINET, CLEAN PLAYFIELD, ETC...

REVERSE PROCEDURE WHEN SERVICE IS COMPLETE.

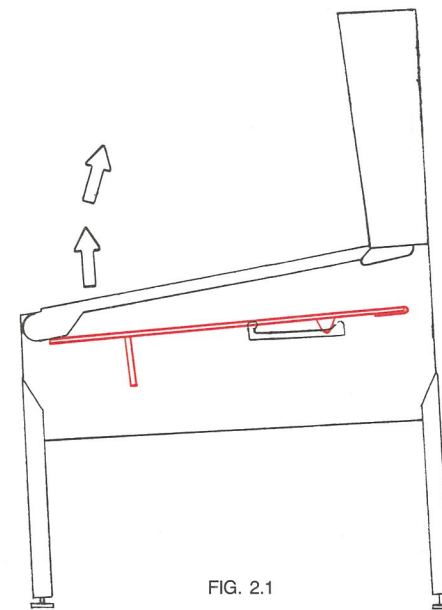


FIG. 2.1

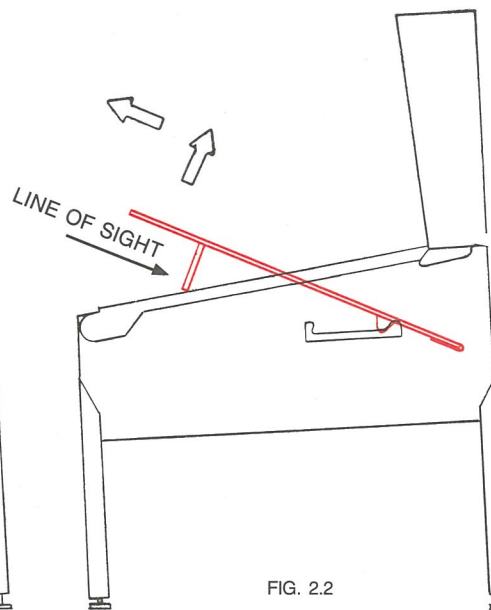


FIG. 2.2

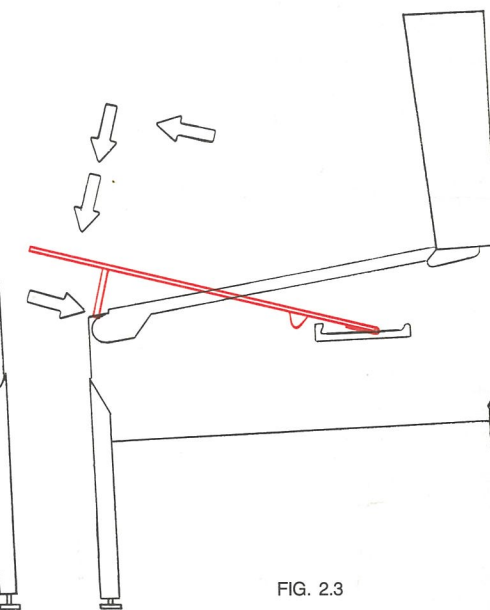


FIG. 2.3

SERVICE POSITION 3

WITH PLAYFIELD AT REST (FIG. 3.1), HOLD SIDES OF PLAYFIELD AND PULL TOWARD FRONT OF CABINET (APPROX. 6-8 INCHES), UNTIL RESISTANCE IS FELT FROM THE SLIDER BRACKETS LOCATED ON EITHER SIDE OF THE CABINET (FIG. 3-2). AT THIS TIME SWIVEL PLAYFIELD TOWARD BACK BOX, THEN REST ON TOP EDGE OF BACK BOX.

USEFUL TO SERVICE ALL PLAYFIELD BOTTOM COMPONENTS, CABINET COMPONENTS, ETC...

REVERSE PROCEDURE WHEN SERVICE IS COMPLETE.

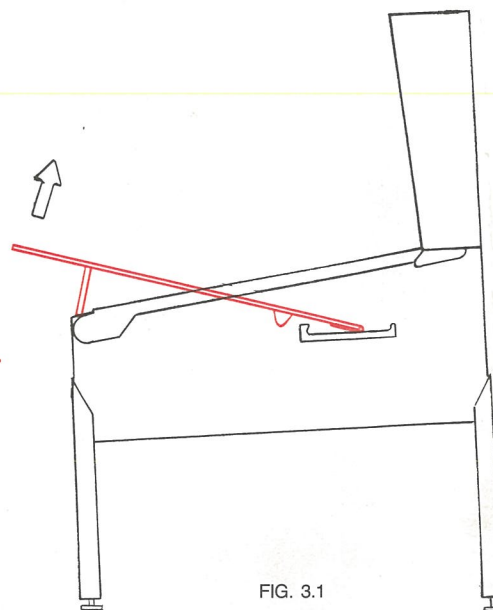


FIG. 3.1

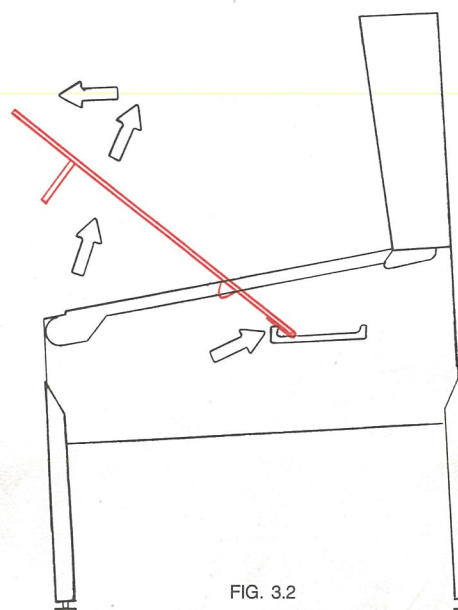


FIG. 3.2

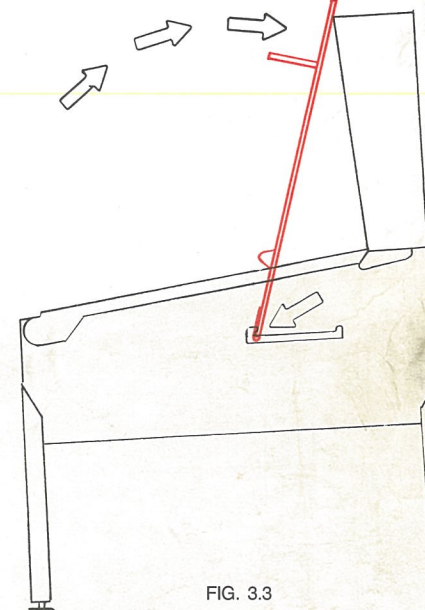


FIG. 3.3