



E-122-123
 TRANSFORMER
 WIRING FOR
 220/240 V.
 50/60 CYCLE INPUT

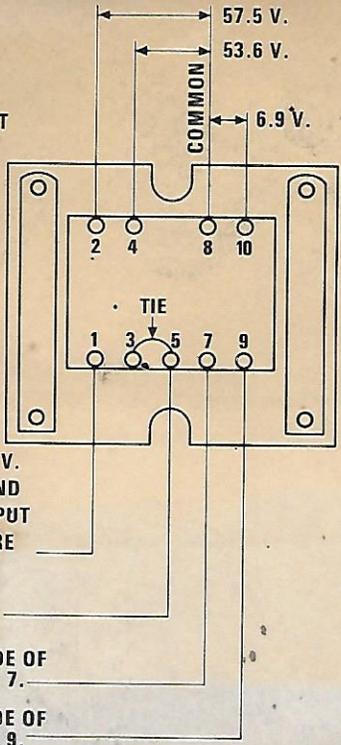

FOR 220 V. OR 240 V.
 INPUT TIE LUG 3 AND
 LUG 5 TOGETHER. PUT
 70-1 (ORANGE) WIRE
 ON LUG 1.
 LUG 5 (115 V. TAP)
 FOR 240 V. ONE SIDE OF
 LINE CORD ON LUG 7.
 FOR 220 V. ONE SIDE OF
 LINE CORD ON LUG 9.

E-122-124
 TRANSFORMER
 WIRING FOR
 115 V.
 60 CYCLE INPUT

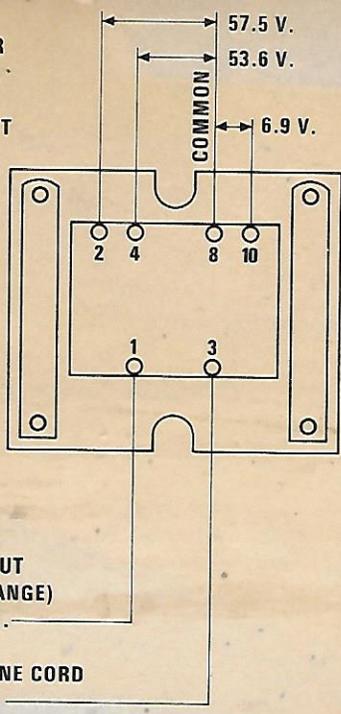

FOR 115 V. INPUT
 PUT 70-1P (ORANGE)
 WIRE ON LUG 1.
 ONE SIDE OF LINE CORD
 ON LUG 3.

IMPORTANT
 THESE SPECIALLY TAPPED
 TRANSFORMERS PROVIDE FOR
 LOCATIONS WITH LOW LINE
 VOLTAGE. MOVING THE 15
 (RED-WHITE) WIRE FROM THE
 LOW TAP (LUG 4) TO THE HIGH
 TAP (LUG 2) WILL ALLOW GAME
 TO OPERATE AT A LOW LINE
 VOLTAGE.

CAUTION:
 AT NO TIME SHOULD THE 15
 (RED-WHITE) WIRE BE LEFT ON
 THE HIGH TAP WHEN LOCATION
 VOLTAGE EQUALS OR EXCEEDS
 110/220 VOLTS.