

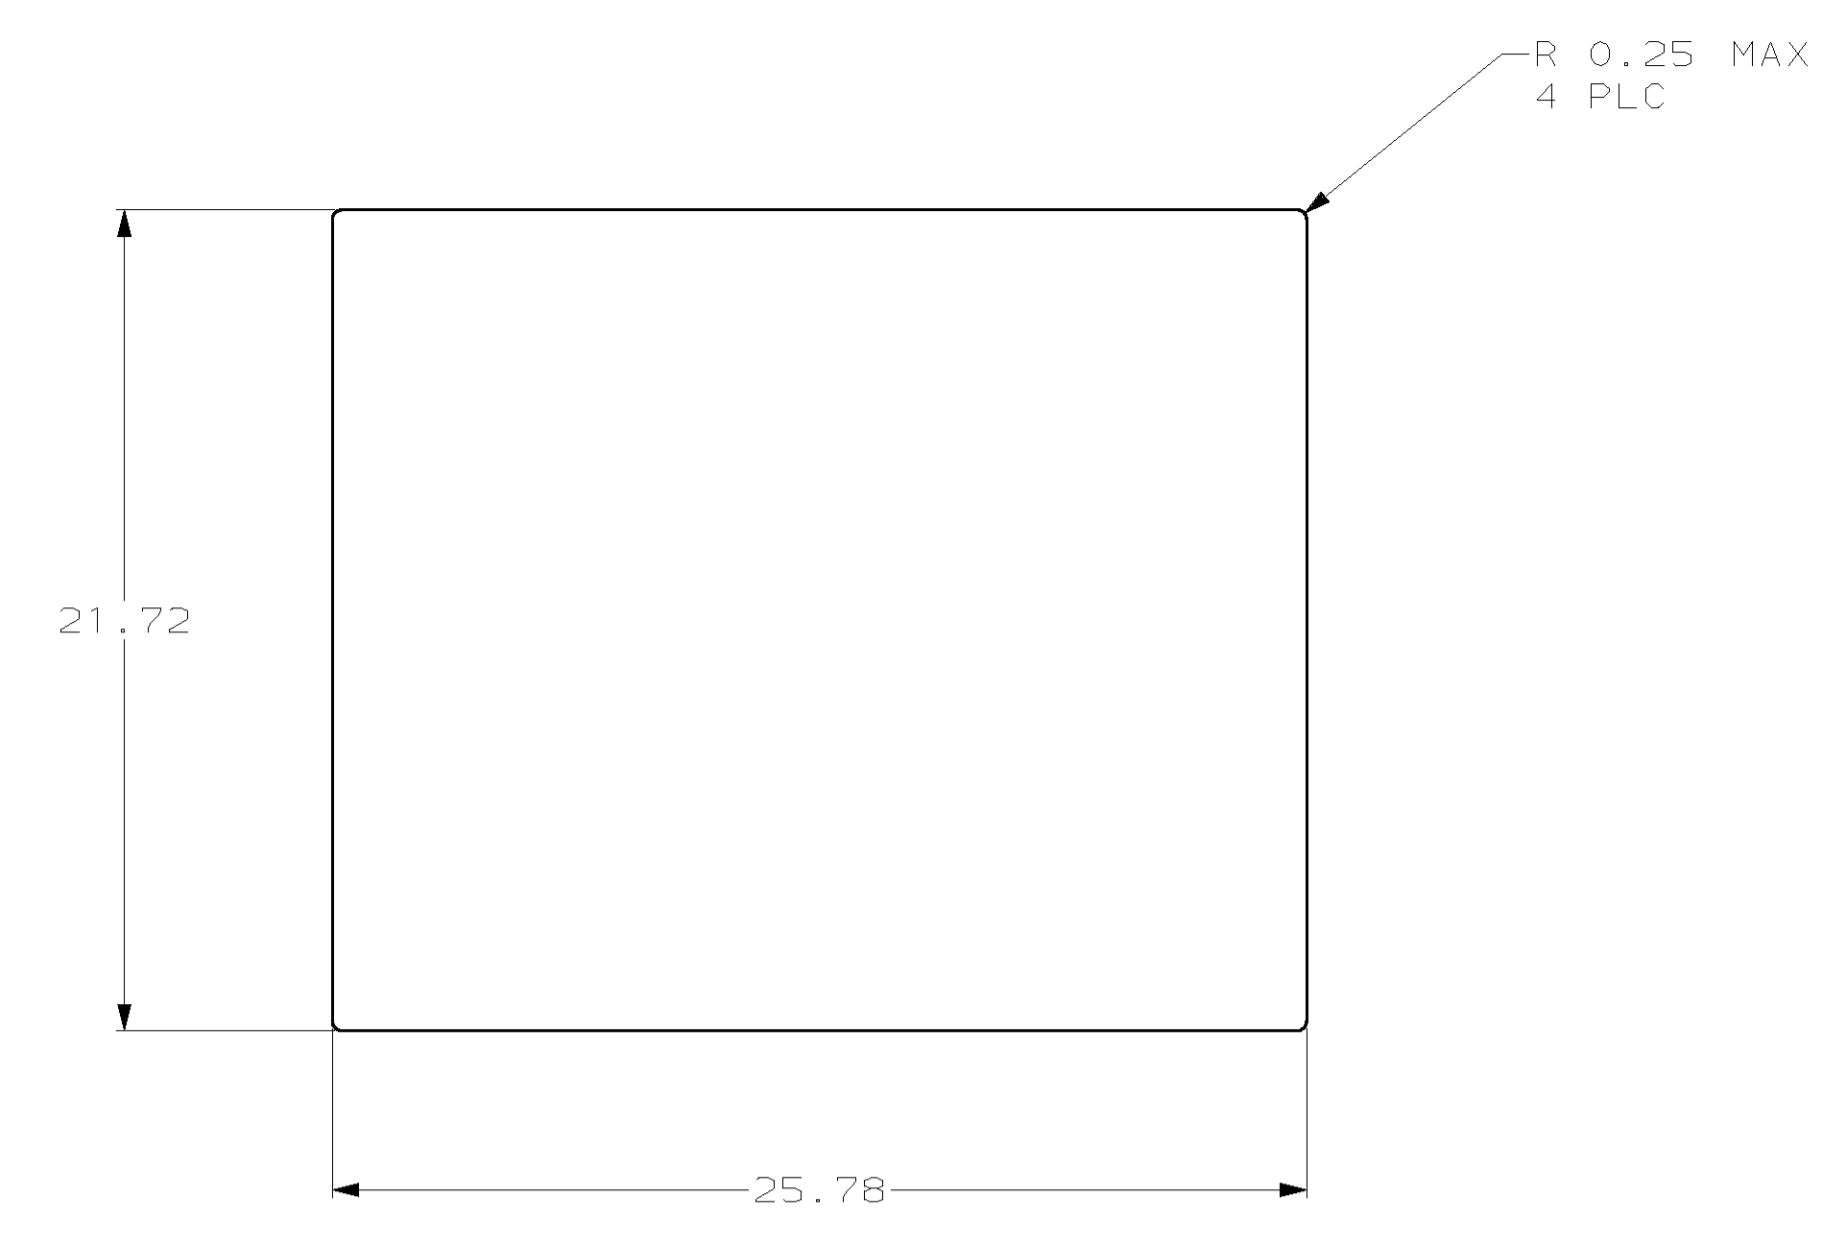
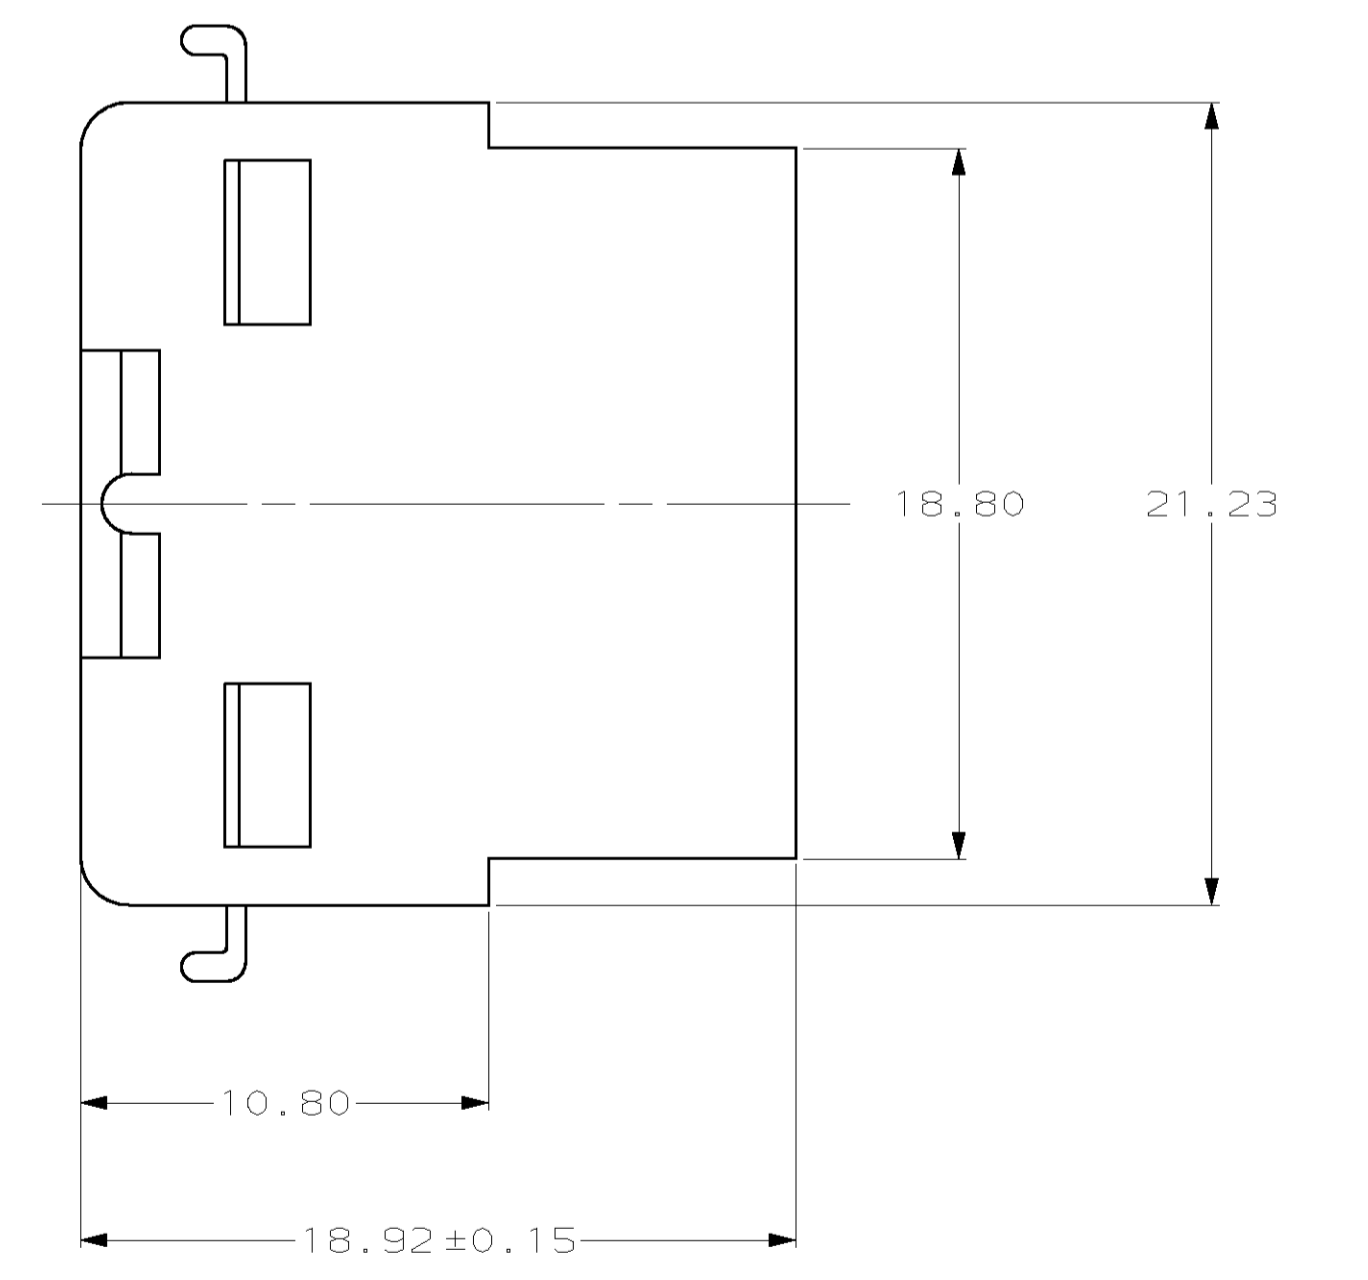
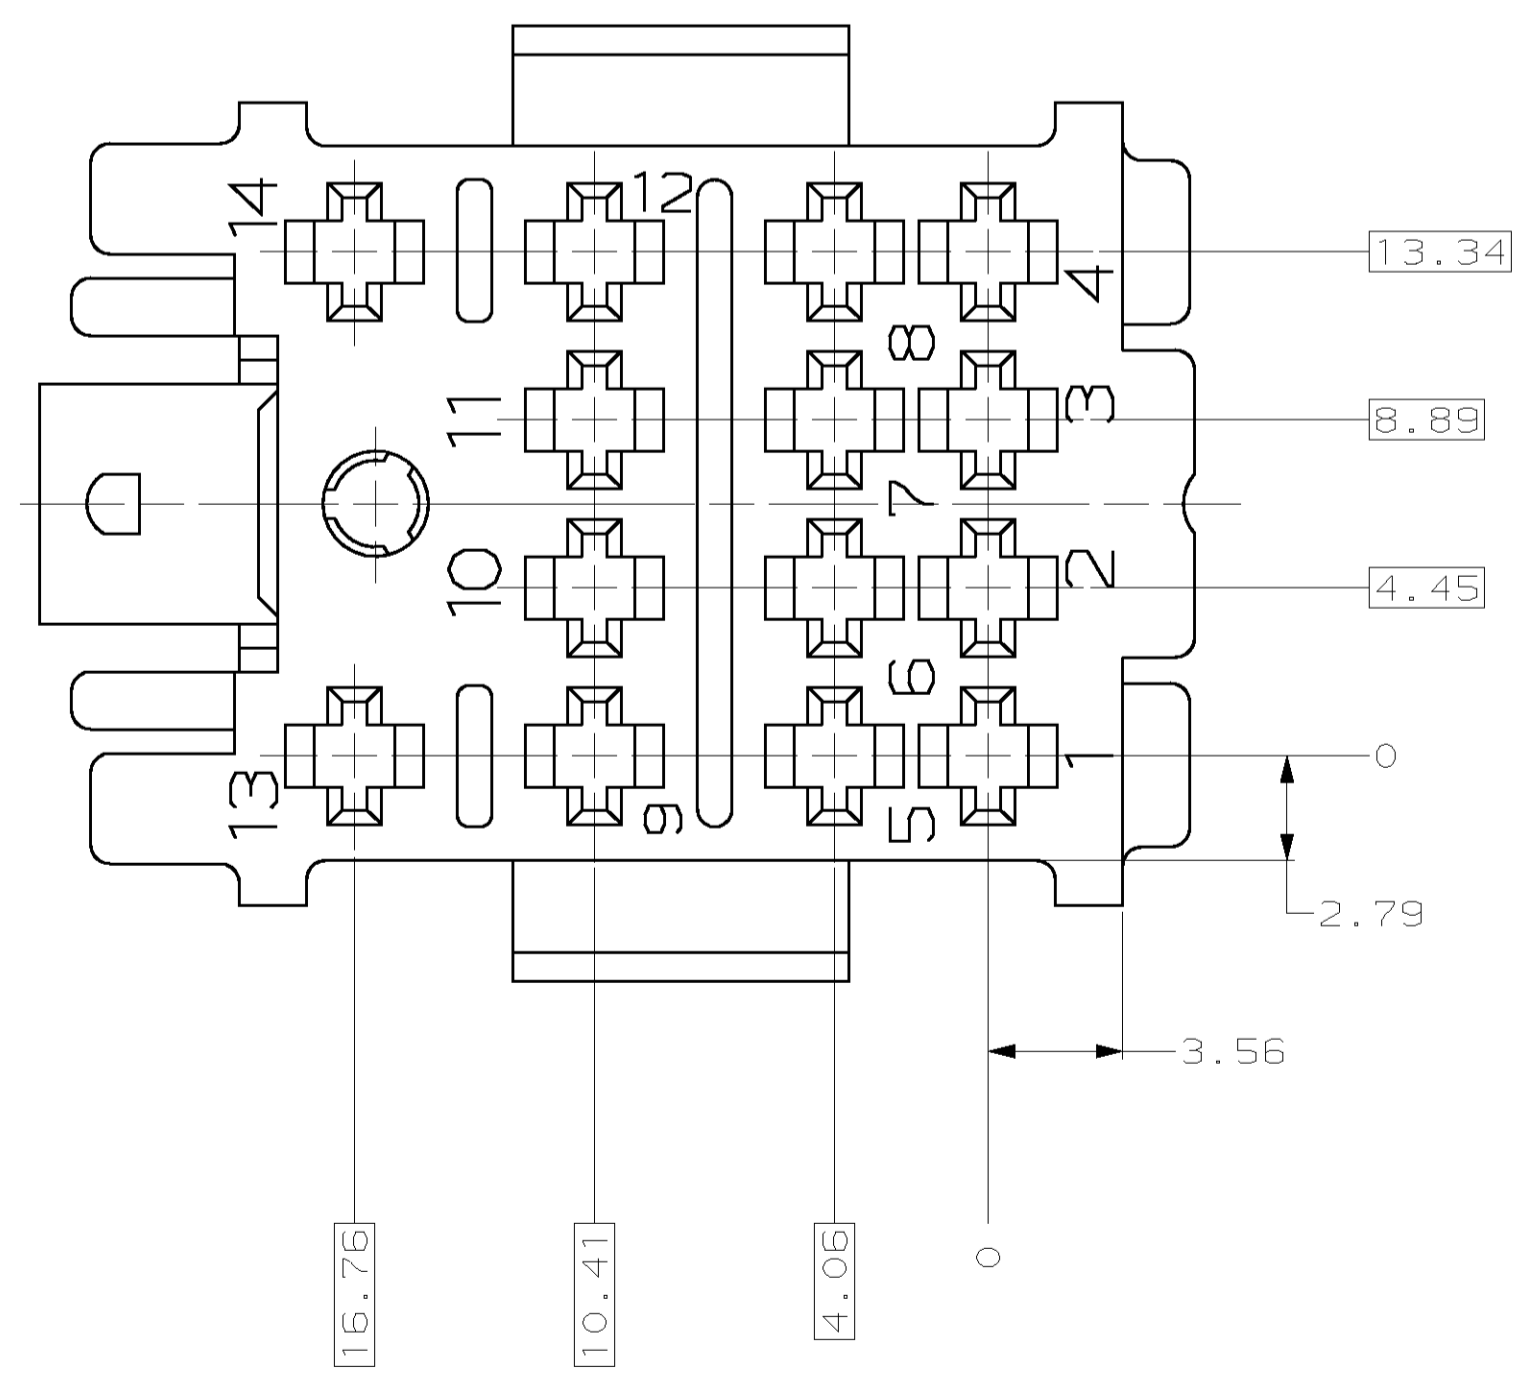


LOC		DIST		REVISIONS			
CM	52	FR	LYR	DESCRIPTION	DATE	DWN	APVD
		L		REVISED PER EC 0638-0182-01	25-AUG-03	KW	JE

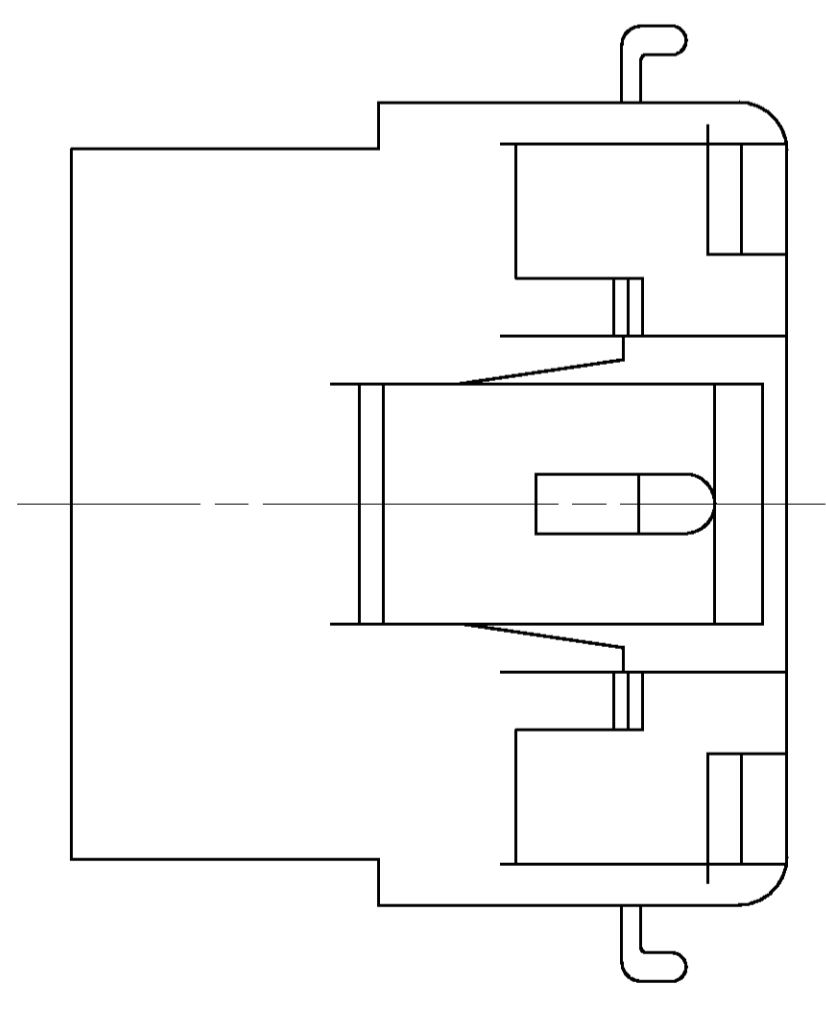

RECOMMENDED CUT OUT FOR 1.57 MAX THICK PANEL

- SLOT FOR RETAINING SPRING.
- 2. HOUSING ACCEPTS TERMINALS 350057 OR 350059.
- IF PANEL CUT OUT IS PUNCHED, HOUSING MUST ENTER PANEL FROM THE PUNCH SIDE.
- 4. RELAYS MAY BE MOUNTED ON 26.97 X 31.75 CENTERS.

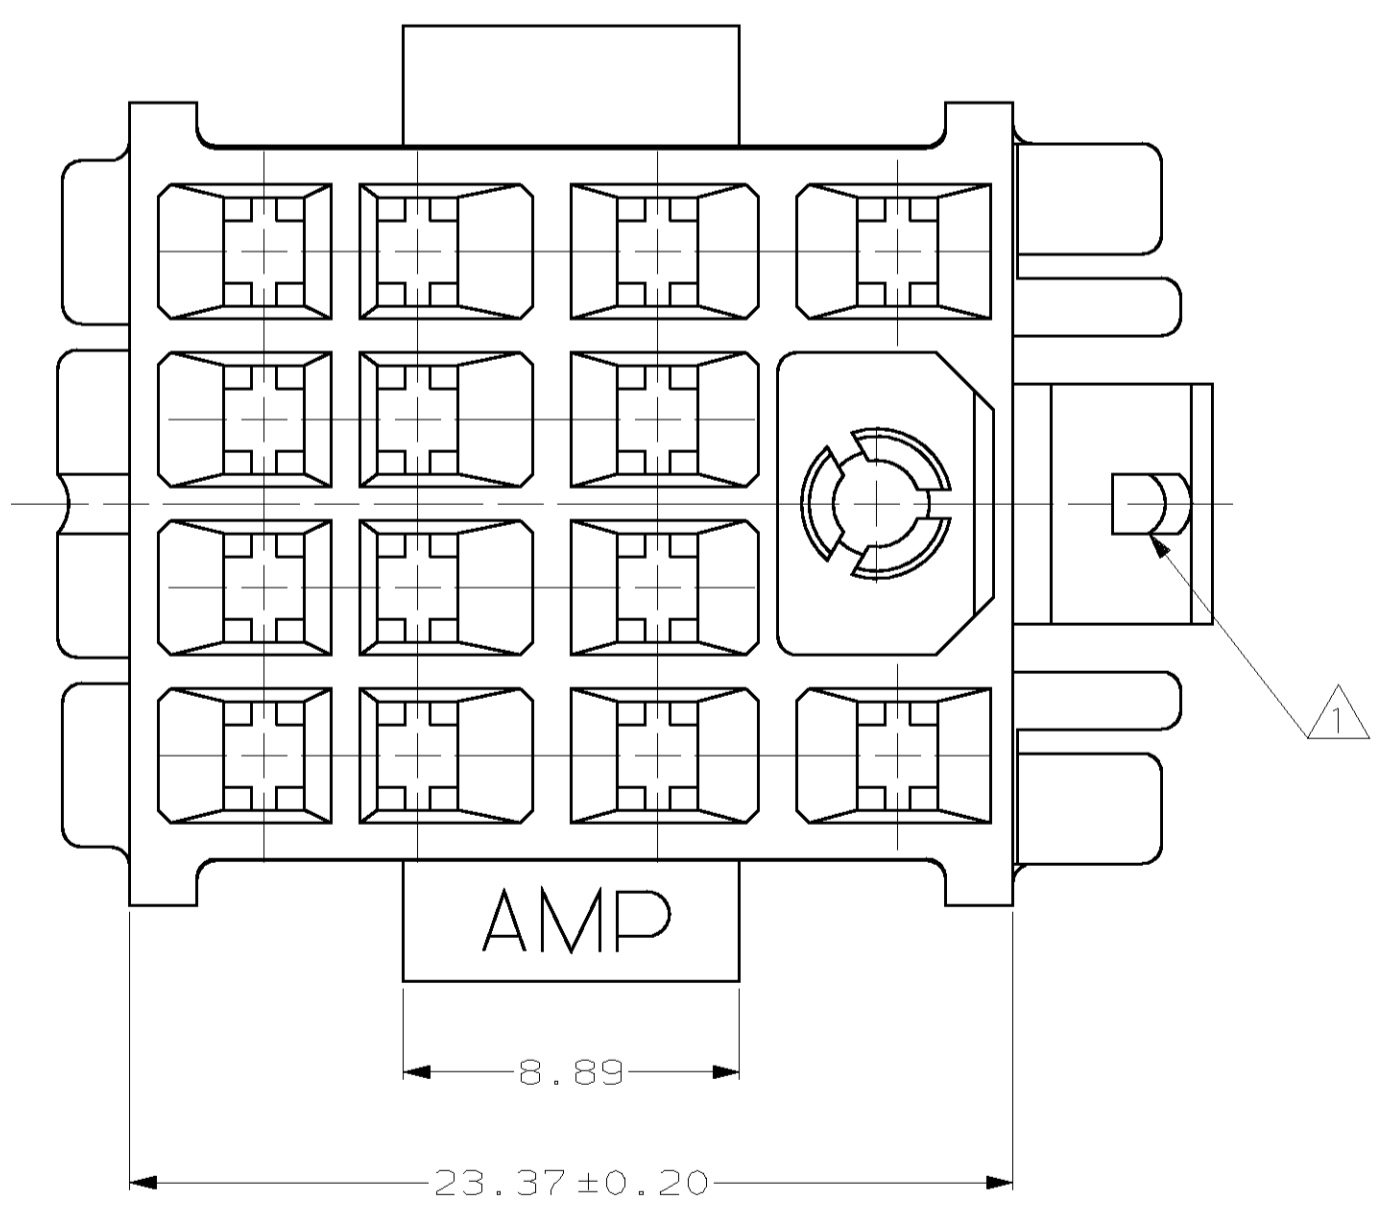

OBSOLETE

350206-1
PART NUMBER

2.79	.110	10.80	.425	21.72	.855	-	-
1.57	.062	10.41	.410	21.23	.836	-	-
0.25	.010	8.89	.350	18.92	.745	31.75	1.250
0.20	.008	4.45	.175	18.80	.740	26.97	1.062
0.15	.006	4.06	.160	16.76	.660	25.78	1.015
0.13	.005	3.56	.140	13.34	.525	23.37	.920
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	T. BECK	3-6-98
mm	0 PLC ±.01	CHK	R. SWING	2-6-98
	1 PLC ±.02	APP'D	C. JONES	3-6-98
	2 PLC ±.03	PRODUCT SPEC		
	3 PLC ±.04	APPLICATION SPEC		
	4 PLC ±.05	WEIGHT		
	ANGLES			
MATERIAL	NYLON, NAUTRAL	FINISH		

AMP Incorporated
Harrisburg, PA 17105-3508

OBSOLETE

HOUSING, 14 CIRCUIT, RELAY CONNECTOR

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 350206 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: 5:1 SHEET: 1 OF 1 REV: L