

"RELAYS"

INDEX	NO.	COIL NO.	TYPE	CONTACTS	USE
11E	A	A-3891	INTER-LOCK	4A, 1C	RESET COMPLETED RELAY
11E	B	A-3891	INTER-LOCK	4A, 1C	RESET COMPLETED RELAY
2E	C	A-9735	AG.	3A	POP BUMPER RELAY
2E	D	A-9735	AG.	3A	ADD BONUS UNIT RELAY
5E	D	A-9735	AG.	3A	500 POINT RELAY
12E	E	A-9735	AG.	3A, 1B	BALL KICKER RELAY
3E	F	A-9740	AG.	3A	MULTI-BONUS RELAY
8E	G	A-9735	AG.	4A	BONUS SCORE RELAY
9E	H	A-9738	AG.	3A, 3B	TILT HOLD RELAY
5E	I	A-9735	AG.	2A, 1C	"WOM" RELAY
8E	J	A-9740	AG.	2A, 1C	100,000 POINT RELAY
4E	K	A-9735	AG.	4A	1000 POINT RELAY
5E	L	A-9735	AG.	4A	1000 POINT RELAY
6E	M	A-9735	AG.	4A	100 POINT RELAY
4E	N	A-9735	AG.	4A	100 POINT RELAY
8E	O	A-9735	AG.	6A, 1B	BALL RETURN RELAY
11E	P	A-9740	AG.	3A, 1C	SEQUENCE COMPLETED RELAY
3E	Q	A-9740	AG.	3C	ALTERNATING RELAY
12E	R	A-9738	AG.	4A	HOLD RELAY
12E	S	A-9740	AG.	6A	START RELAY
8E	T	A-9742	AG.	1B	TILT RELAY
4E	U	A-9733	AG.	1A	SERIES RELAY
10E	V	A-9740	AG.	3B	1ST. BALL RELAY
10E	W	A-9740	AG.	3A, 1C	ADD BALL COUNT UNIT RELAY
12E	X	A-9740	AG.	1A, 1B	CREDIT BUTTON RELAY
12E	Y	A-9738	AG.	3A	CREDIT HOLD RELAY
11E	Z	A-9740	AG.	5A	RESET RELAY
3E	AX	A-489	AG.	2A	BALL KICKER GATE RELAY
3E	BX	A-489	AG.	2A	BALL SHOOTER GATE RELAY

"SEQUENCE BANK"

INDEX	NO.	COIL NO.	CONTACTS	USE
3E	1B	A-1119	1A, 1B	#1 ROLLOVER BUTTON RELAY
3E	2B	A-1119	1A, 1B	#2 ROLLOVER BUTTON RELAY
3E	3B	A-1119	1A, 1B	#3 ROLLOVER BUTTON RELAY
3E	4B	A-1119	1A, 1B	#4 ROLLOVER BUTTON RELAY
4E	5B	A-1119	1A, 1B	#5 ROLLOVER BUTTON RELAY
4E	6B	A-1119	1A, 1B	#6 ROLLOVER BUTTON RELAY
4E	7B	A-1119	1A, 1B	#7 ROLLOVER BUTTON RELAY
4E	8B	A-1119	1A, 1B	#8 ROLLOVER BUTTON RELAY
4E	9B	A-1119	1A, 1B	#9 ROLLOVER BUTTON RELAY
4E	10B	A-1119	1A, 1B	#10 ROLLOVER BUTTON RELAY

"OTHER COILS USED"

INDEX	COIL NO.	DESCRIPTION
1E	A-5141	FLIPPER COILS
2E	A-4893	POP BUMPER COIL
2E	A-12092	CHIME COILS
2E	A-1496	ADD BONUS UNIT COIL
9E	A-5194	SUBTRACT BONUS UNIT COIL
9E	A-5143	KNOCKER COIL
8E	A-1496	ADD BALL COUNT UNIT COIL
9E	A-5194	SUBTRACT BALL COUNT UNIT COIL
8E	A-1496	BALL RETURN COIL
9-10E	A-9154	SCORING UNIT COILS
11E	A-4893	BALL KICKER COIL
12E	A-7677	COIN LOCKOUT COIL
12E	A-7800	SEQUENCE BANK RESET COILS

"WORD ABBREVIATIONS"

R. O. - ROLLOVER
 POS. - POSITION
 SW. - SWITCH
 SUBT. - SUBTRACT
 ADJ. - ADJUSTABLE
 SPEC. - SPECIAL
 SEQ. - SEQUENCE


"COLOR CODE ABBREVIATIONS"

BL - BLUE
 BR - BROWN
 BK - BLACK
 GR - GREEN
 OR - ORANGE


SL - SLATE
 YEL - YELLOW
 WH - WHITE
 MAR - MAROON
 PUR - PURPLE

EXAMPLE:
 BL-WH - BLUE WITH A WHITE TRACER.
 BL & WH - BLUE AND WHITE MOTTLED.

MOTOR SWITCH POSITIONS

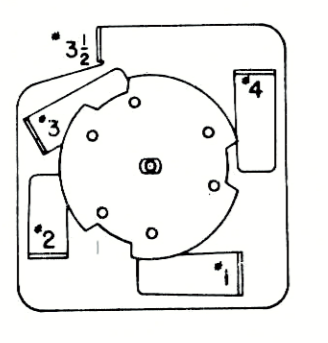

POSITION	A	B	C	D	E
#1	2A "S" POS.	1A	1A, 5B "S" POS.		
#2		4B	3A "L" POS.		
#3		2A	2A "S" POS.		
#4	1A "S" POS.	1A, 2B	1A "S" POS.		

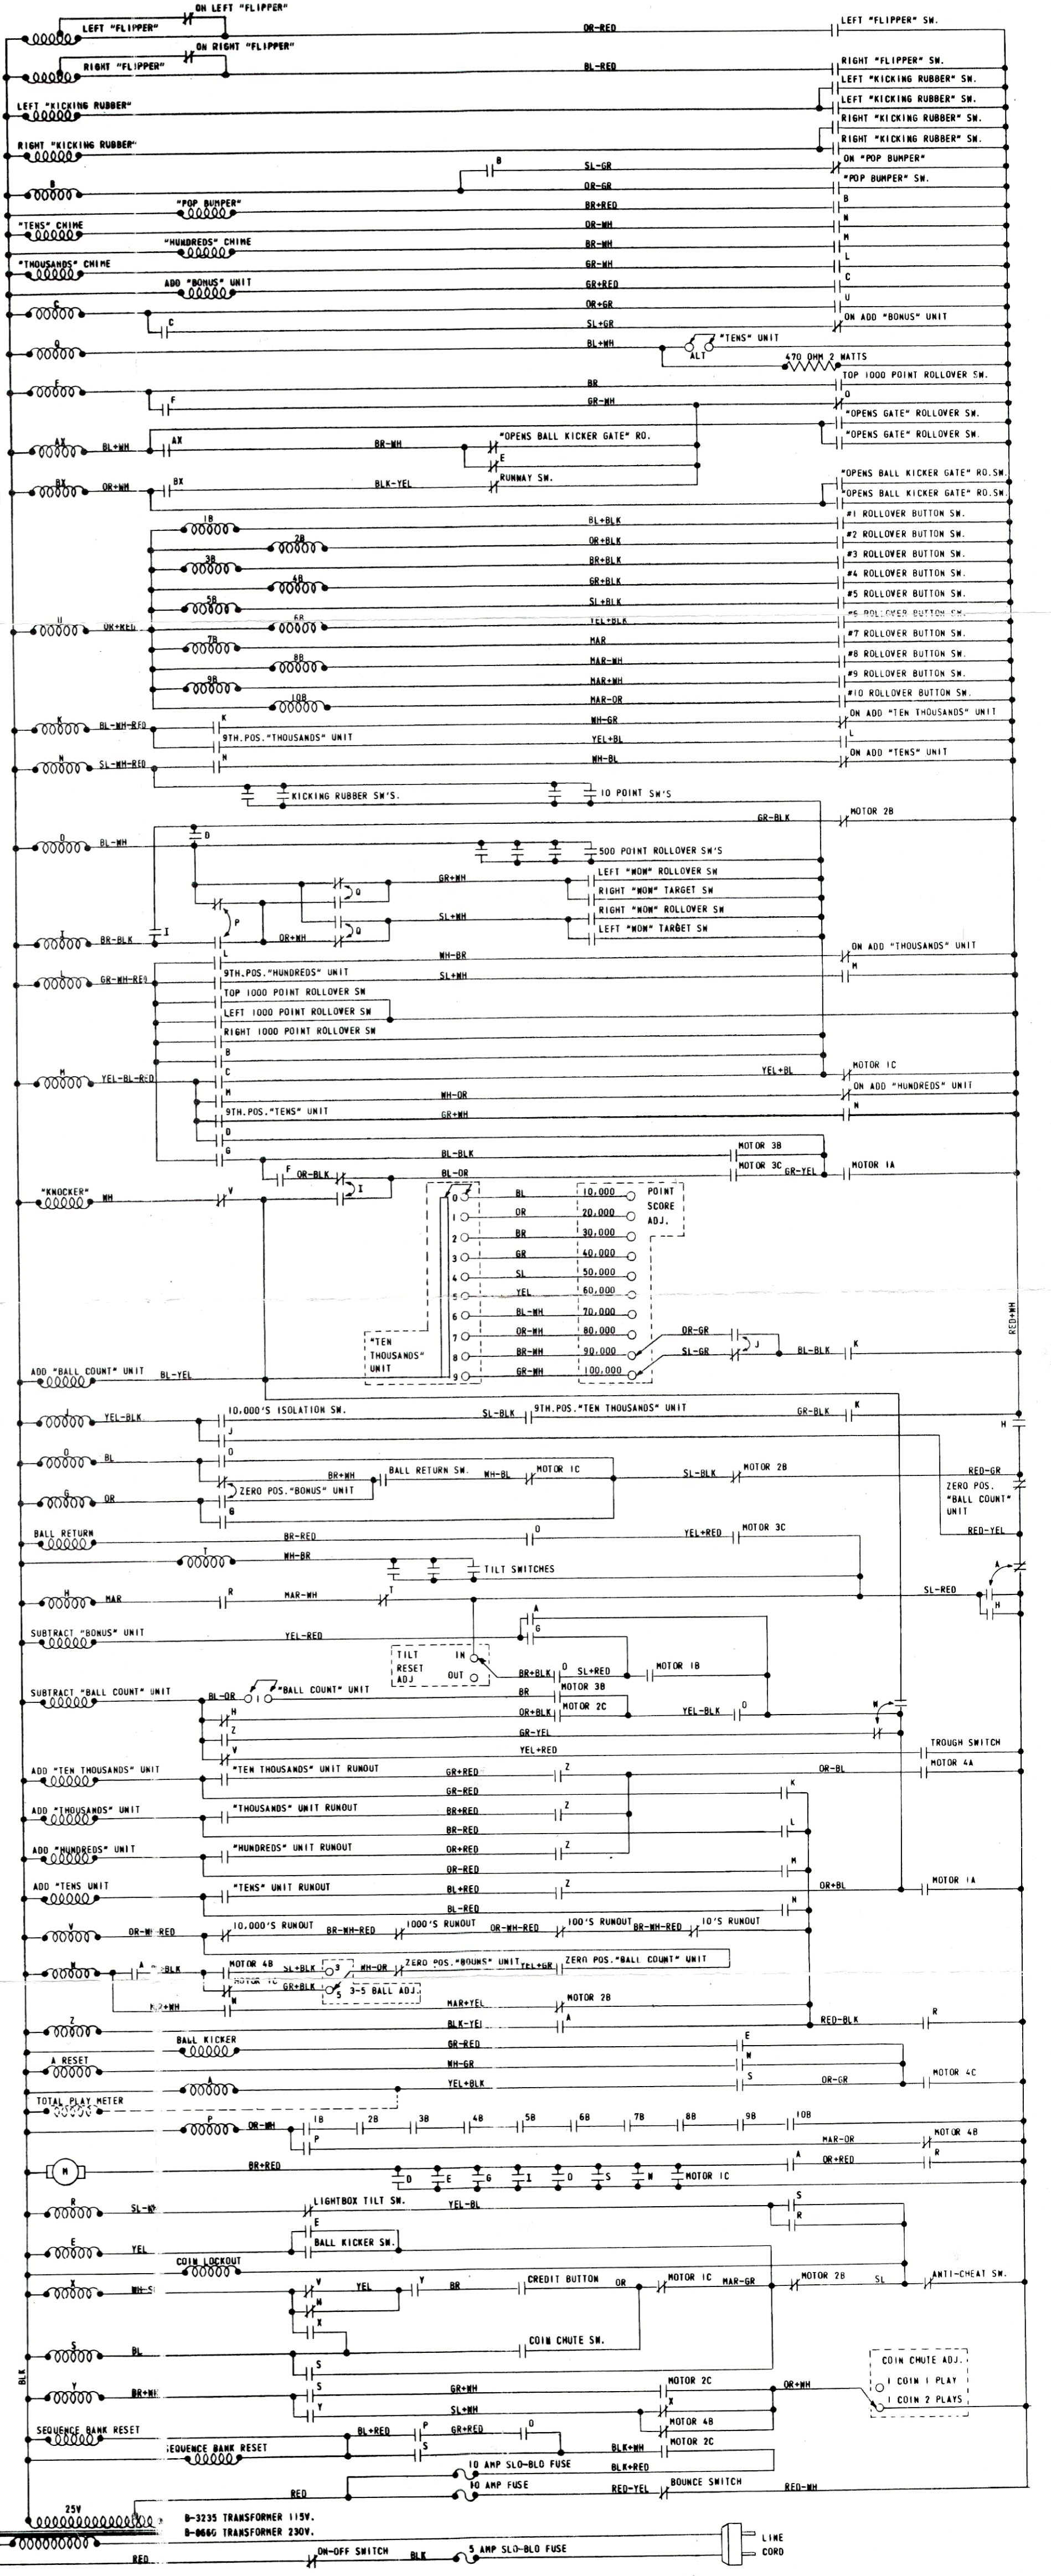

Reproduced with permission from
 Outback Development, LLC
 P.O. Box 889, Felham, NY 10803 USA,
 owner of the
 Gottlieb & D. Gottlieb & Co.®
 trademarks and related copyrights, by
 Steve Young, The Pmbal Resource,
 8 Commerce Street,
 Poughkeepsie, NY 12603 USA.
 No further reproduction permitted.

D. Gottlieb & Co.
 185 W. LAKE ST.
 NORTH LAKE, ILL. 60164

JUNGLE KING

RM-10-11-72-355

B-3235 TRANSFORMER 115V.
 B-8666 TRANSFORMER 230V.