


NOTES:

- 1 INDICATES NOT USED.
- 2 N/U - NOT USED ON PLAYFIELD.
- 3 \* INDICATES AID TEST POINT.
- 4 COIL DIODES ARE IN4004,(E-587-6). SWITCH DIODES ARE IN4148,(E-587-14)  
ALL CAPACITORS ARE .05 MFD,(E-586-80)
- 5 GERMANY ONLY - CAPACITOR .01 MFD. @ 500V., (E-586-65)

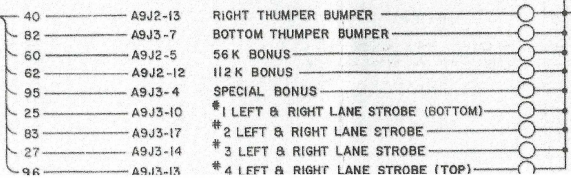

ALL DESIGN, OPERATING AND PROCESS DATA PERTAINING TO THIS ARTICLE IS THE PROPERTY OF BALLY MANUFACTURING CORP. THIS INFORMATION IS TO BE KEPT IN CONFIDENCE AND IS NOT TO BE COPIED, REPRODUCED, RELEASED OR OTHERWISE DISSEMINATED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF THE COMPANY. THE PRINT IS LEGAL AND MUST NOT BE USED IN ANY MANNER UNLESS AUTHORIZED BY THE COMPANY AND MUST BE RETURNED TO US.

REMOVE ALL BUSES

DES BY	DATE	11-27-60
CK BY	DATE	
AP'D BY	DATE	
CHK'D BY	DATE	
DATE	11-27-60	
TIME		
HARDENING		

TOLERANCES ON DIMENSIONS UNLESS OTHERWISE SPECIFIED: FRACTIONS: 1/64 DECIMALS: .006 ANGLES: °

DO NOT SCALE DRAWING

**Bally MANUFACTURING CORP.**  
 240 BELMONT AVENUE  
 CHICAGO, ILLINOIS  
 #1220

WIRING DIAGRAM-PLAYFIELD

MATERIAL: FIGHT BALL DELUXE

PART NO: GW-1192-28c