


A-12697-3 Power Driver Board

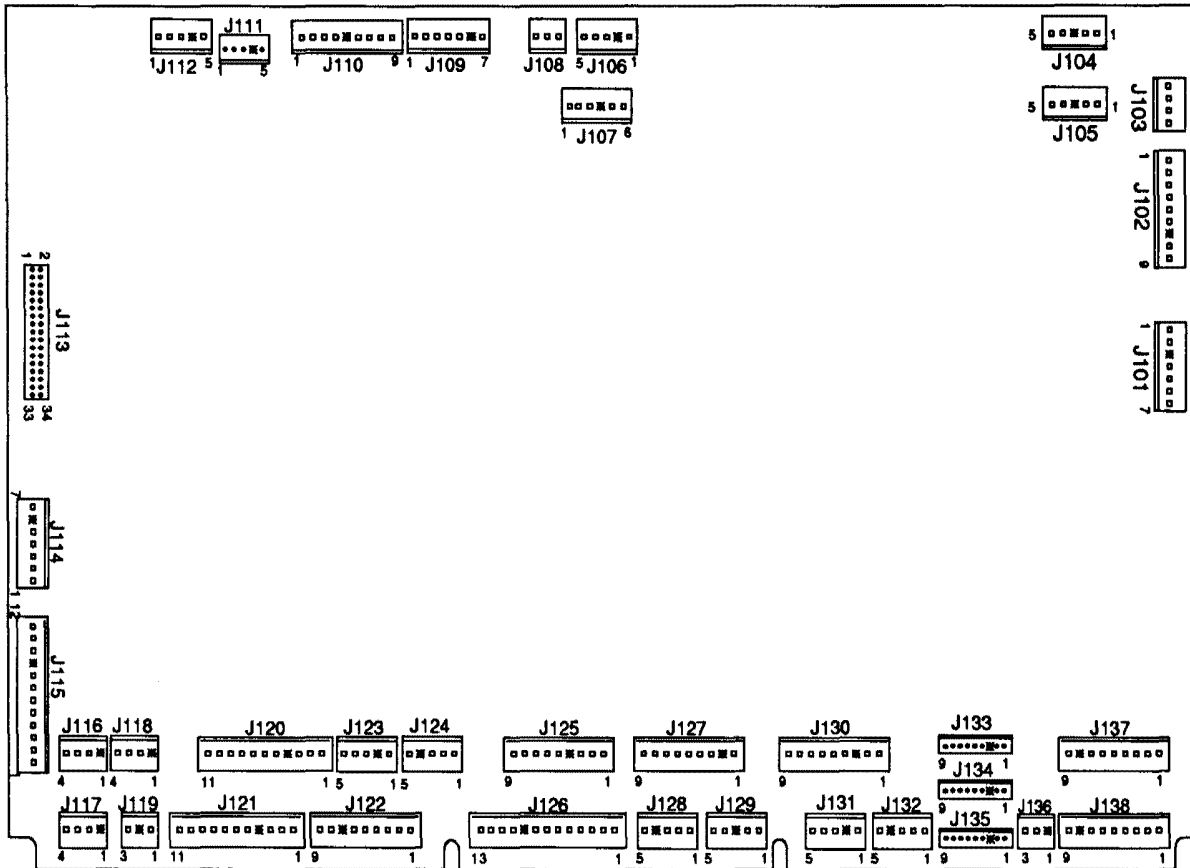

- | | |
|---|---|
| J101-1 Red, 9VAC, from xformer secondary | J105-1 N/C |
| J101-2 Red, 9VAC, from xformer secondary | J105-2 N/C |
| J101-3 N/C | J105-3 N/C |
| J101-4 Blue-White, 13VAC, from xformer secondary | J105-4 N/C |
| J101-5 Blue-White, 13VAC, loop from J101-4 | J105-5 N/C |
| J101-6 Blue-White, 13VAC, from xformer secondary | J106-1 N/C |
| J101-7 Blue-White, 13VAC, loop from J101-6 | J106-2 N/C |
| J102-1 White-Red, 16VAC, loop from J102-2 | J106-3 N/C |
| J102-2 White-Red, 16VAC, from xformer secondary | J106-4 N/C |
| J102-3 White-Red, 16VAC, loop from J102-4 | J106-5 Red-White, +20V, to backbox flashlamps |
| J102-4 White-Red, 16VAC, from xformer secondary | J107-1 N/C |
| J102-5 Black-Yellow, 16VAC, loop from J102-6 | J107-2 Red-Brown, +50V, to coils |
| J102-6 Black-Yellow, 16VAC, from xformer secondary | J107-3 Red-Black, +50V, to coils |
| J102-7 N/C | J107-4 N/C |
| J102-8 Black-Yellow, 16VAC, loop from J102-9 | J107-5 N/C |
| J102-9 Black-Yellow, 16VAC, from xformer secondary | J107-6 Red-White, +20V, to playfield |
| J103-1 Black, ground, to 8-Driver Brd J2-4 | J108-1 N/C |
| J103-2 Black, ground, to 8-Driver Brd J2-5 | J108-2 N/C |
| J103-3 N/C | J108-3 N/C |
| J103-4 N/C | J109-1 N/C |
| J104-1 White-Blue, 50VAC, to Fliptronic II Board J901-3 | J109-2 N/C |
| J104-2 White-Blue, 50VAC, to Fliptronic II Board J901-1 | J109-3 N/C |
| J104-3 N/C | J109-4 N/C |
| J104-4 N/C | J109-5 N/C |
| J104-5 N/C | J109-6 N/C |
| | J109-7 N/C |