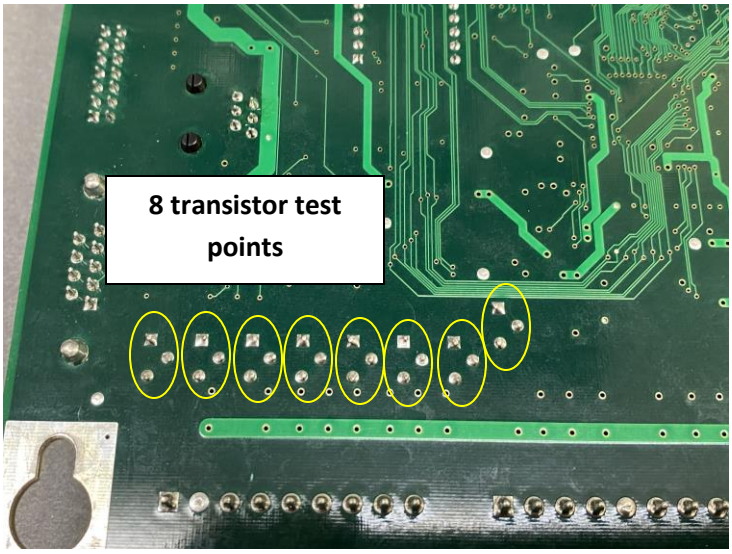
8 transistor test points

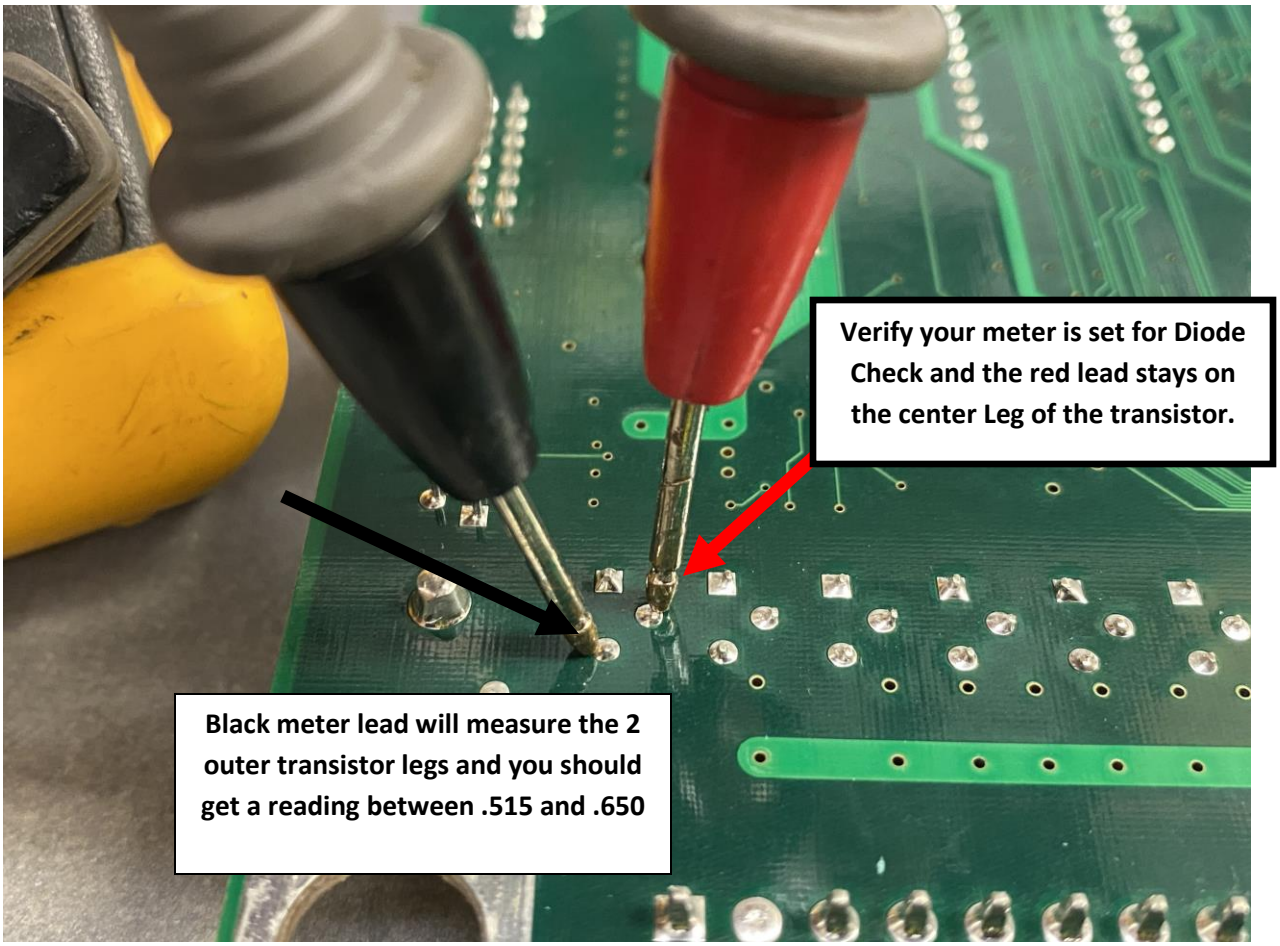
Verify your meter is set for Diode Check and the red lead stays on the center Leg of the transistor.
Black meter lead will measure the 2 outer transistor legs and you should get a reading between .515 and .650

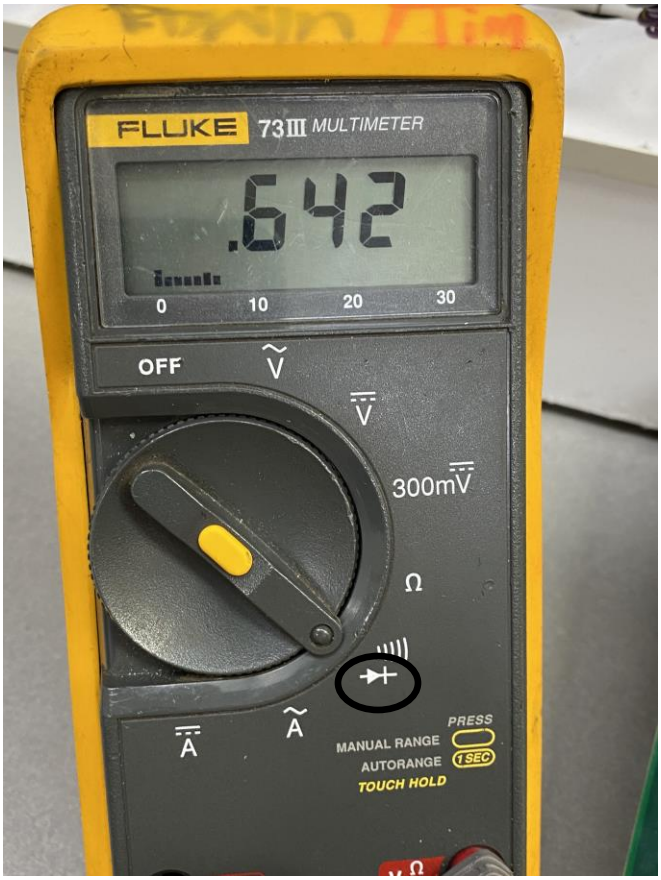
FLUKE 73III MULTIMETER
.642
0 10 20 30
OFF
300mV
Ω
A
A
PRESS
MANUAL RANGE
AUTORANGE
1 SEC
TOUCH HOLD

FLUKE 73III MULTIMETER
.643
0 10 20 30
OFF
V
V