Tigersaw 3D Mod installation Guide:

3D tiger saw mod for Theatre of Magic pinball

- **3D printer tiger**
- **Gold Saw Blade**
- **Cable with connector J125 and TP2**

Mod will only work with U6 1.4H rom

Saw will rotate and led eyes will be activated when:

- **Tigersaw mode is activated**
- **Tigersaw multiball is activated**
- **Tigersaw captive ball is hit**

Tools:

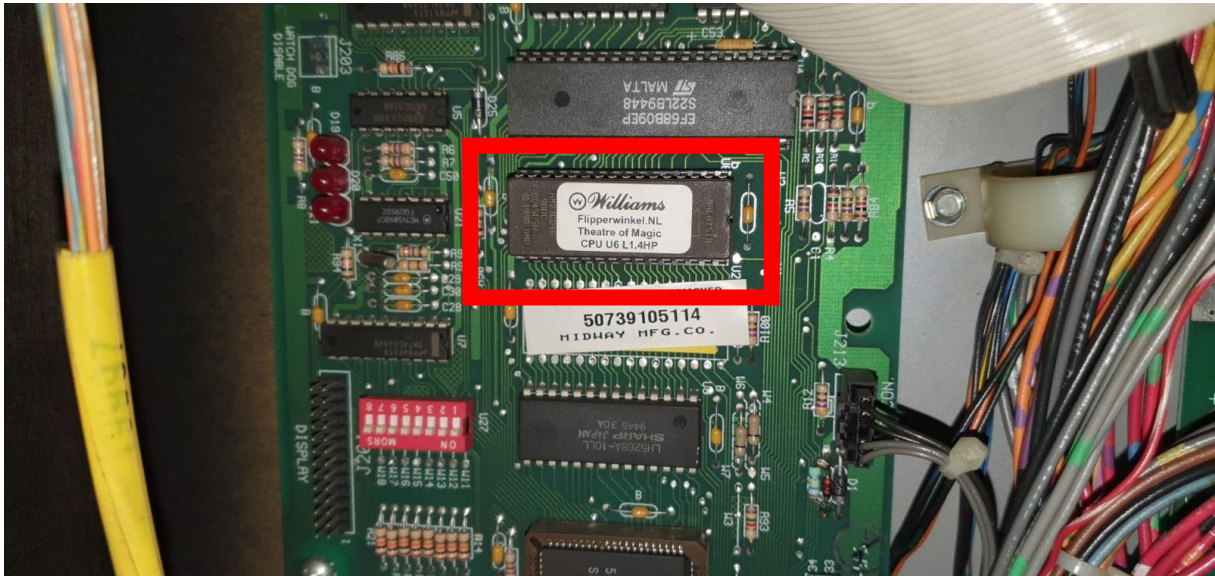Nut Driver ¼''   (For Dismantling original tiger)

Allen Key 3 (Metric)   (For installing Tiger 3D MOD)
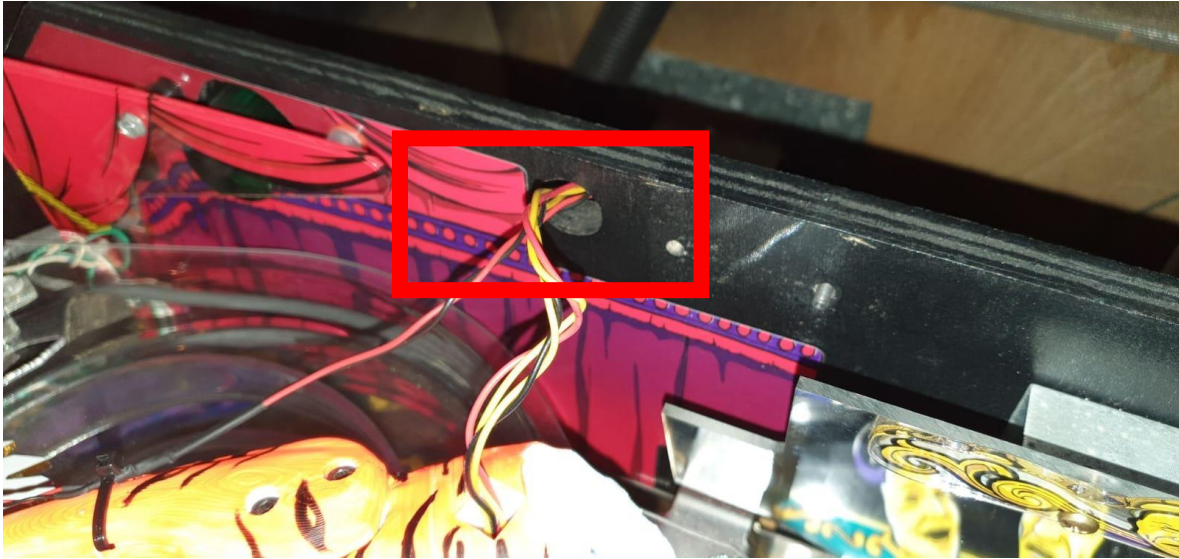
Installation:

1. Switch of power from TOM Pinball machine
2. Replace Game Rom U6 for 1.4H rom

3. Remove original tiger from backboard by removing the 2 hexagon bolts on the backside

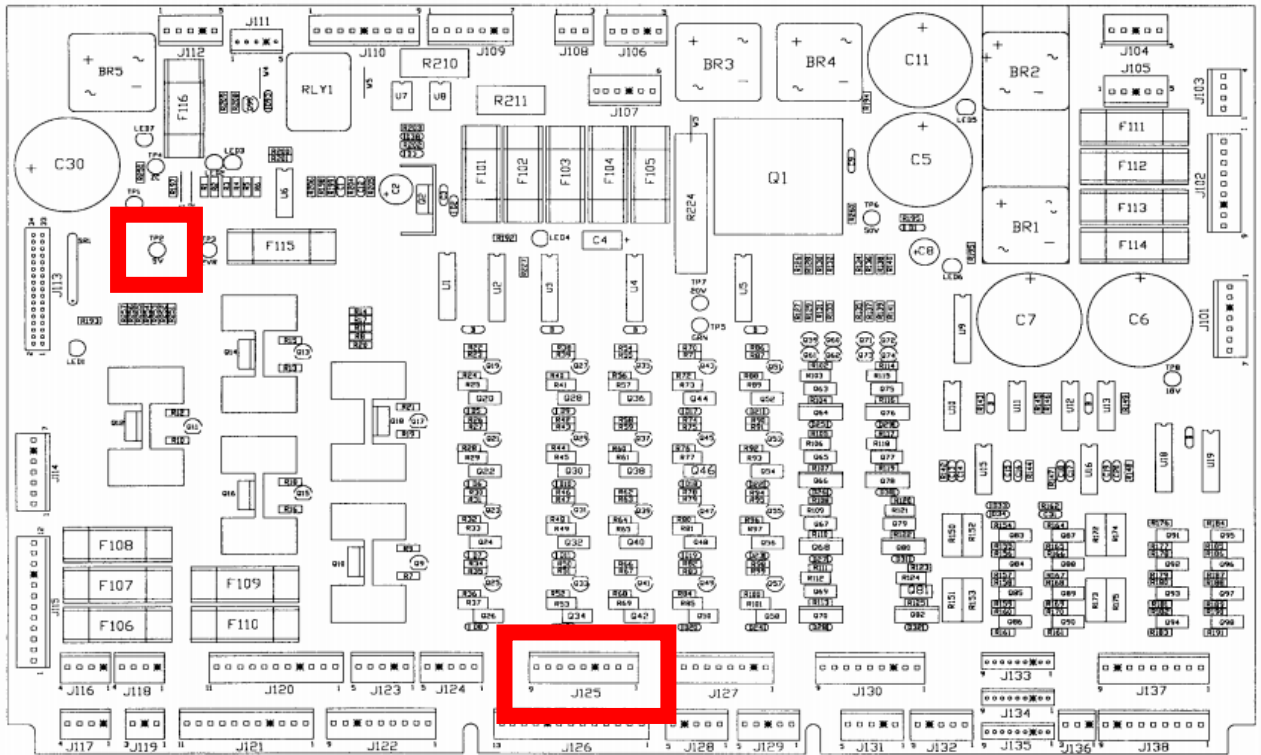4. Feed cable through big hole left from the mounting holes

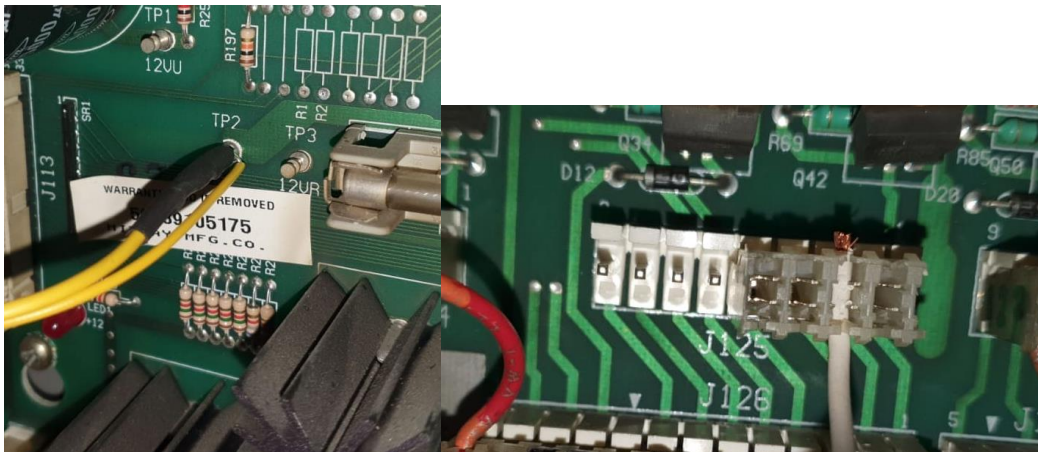5. Use right hole to feed mounting screw (M5) through backboard.

6. Install Tiger mod and fix it

7. Run cable through backbox with big loop so that you can still open the playfield
8. Install cables to J125 en TP2 on the pinball driver board

(Images are from my machine. The one I have sold have connector on J125 that will fit properly)

Testing Mod:

1. Open pinball main menu
2. Go to T. Tests

3. Go to T.4 Solenoid test

4. Go to T.4 19 Tiger Saw Motor when it is on repeat saw blade will move a bit and eyes will lit